


RIVETKING® FBF-CE SERIES • ALL STAINLESS • CLOSED END

CLOSED END • RIVET: 18-8 STAINLESS • MANDREL: STAINLESS

STANDARD BLIND RIVETS

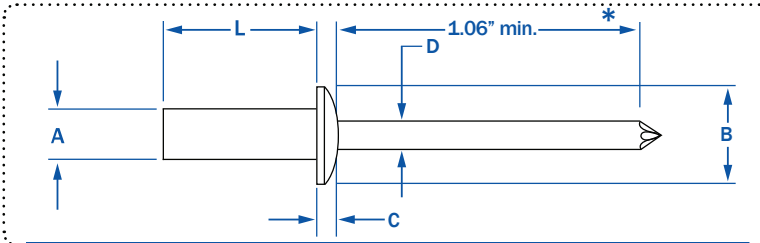

Closed End Rivets are used when a weather proof / leak proof seal is needed. Its completely closed end design prevents liquids, moisture, air and other contaminants from entering the riveted hole and/or the rivet itself. The RivetKing® Closed End rivet design guarantees the mandrel head is fully retained within the rivet. Stainless/Stainless Closed End rivets are bright polished and contain a grooved mandrel which improves jaw life and maintains positive stroke of the riveter. The All-Stainless configuration is corrosion resistant.

RIVET: DOME HEAD, POLISHED, 300 SERIES STAINLESS STEEL
 MANDREL: POLISHED, 400 SERIES STAINLESS STEEL
 Per IFI-126 Grade 51

300 SERIES STAINLESS STEEL MANDREL/ 300 SERIES STAINLESS STEEL RIVET
 AVAILABLE ON REQUEST BY SPECIAL ORDER ONLY.



PART NUMBER	RIVET SIZE	A		L	B	C	D	SHEAR LBS.F	TENSILE LBS.F	
		GRIP RANGE		LENGTH	HEAD DIA	HEAD HEIGHT	MANDREL DIA			HOLE SIZE
		MIN	MAX	MAX	NOM.	NOM.	NOM.			MIN - MAX
FBF - 42 - CE	1/8"	.063	.125	.360	.250	.040	.076	129 - .133 (#30)	400	450
FBF - 43 - CE		.126	.187	.422						
FBF - 44 - CE		.188	.250	.485						
FBF - 45 - CE		.251	.312	.547						
FBF - 46 - CE		.313	.375	.610						
FBF - 48 - CE		.376	.500	.735						
FBF - 52 - CE	5/32"	.020	.125	.375	.312	.050	.095	.160 - .164 (#20)	700	800
FBF - 53 - CE		.126	.187	.437						
FBF - 54 - CE		.188	.250	.500						
FBF - 56 - CE		.251	.375	.562						
FBF - 58 - CE		.376	.500	.625						
FBF - 510 - CE		.501	.625	.750						
FBF - 62 - CE	3/16"	.020	.125	.406	.375	.060	.114	.192 - .196 (#11)	850	900
FBF - 63 - CE		.126	.187	.468						
FBF - 64 - CE		.188	.250	.531						
FBF - 66 - CE		.251	.375	.656						
FBF - 68 - CE		.376	.500	.781						
FBF - 610 - CE		.501	.625	.906						
FBF - 612 - CE	.626	.750	1.026							
FBF - 82 - CE	1/4"	.020	.125	.445	.500	.080	.151	.257 - .261 (F)	1520	1955
FBF - 84 - CE		.125	.250	.570						
FBF - 86 - CE		.251	.375	.695						
FBF - 88 - CE		.376	.500	.820						
FBF - 810 - CE		.501	.625	.945						
FBF - 812 - CE		.626	.750	1.070						
FBF - 814 - CE		.751	.875	1.195						
FBF - 816 - CE		.876	1.000	1.320						



* 1/4" Diameter rivets have a 1.250 mandrel length minimum.



Call Rivet USA (a division of Cardinal Components) to Order or for Quote
 800-236-3200 | info@cardinalcomponents.com | www.rivetusa.com